



FLUID-CIRCULATING CONTROL SYSTEM

TEMPERATURE CONTROL FOR THE BIG JOBS

Sterling's vast background of experience and skill in designing and building temperature control equipment assures you of peak performance from this unit.

Carefully designed and balanced control systems assure sensitivity and instantaneous reaction to temperature changes. Operation is simple, and the unit is complete and easy to use. Ready to operate when power and circulation connections are made.

Several combinations of heater sizes and pumping rates are available. Cooling controls are optional. We will be happy to assist you in selecting the proper unit for your requirements.

Features

- Viking positive displacement, packed pump with drip return pump
- TEFC Pump Motor
- NEMA 12-style electrical control enclosure with IEC electrical components
- Disconnect switch
- Pressure-actuated bypass valve
- System status graphics display
- To Process oil pressure gauge
- Temperature to 550°F
- Heater sizes from 50 to 200 kW
- Pump rates of 90, 150 or 200 gpm
- UL listed electrical subpanel
- Optional cooling capabilities
- M2B+ controller standard
- Low level alarm
- Autoshutdown (M2B+ controller)

Options

- Mechanical seal pump
- Autovent
- Manual bypass
- Shell & Tube heat exchanger

Note: heat exchanger is setup to pulse heat transfer fluid and continuously pass water through tubes.




6017 SERIES



Model Number	Motor hp	Pump Flow gpm	Pressure PSI	Pipe Size NPT	Heating Capacity (kW)						
					50	60	75	100	120	150	200
M2B-6017	5	90	50	2"	small	small	small	small	large	large	large
	10	150	50	2 1/2"	large*	large*	large*	large*	large	large	large
	15	200	50	3"	large	large	large	large	large	large	large

* For these capacities, the unit is built in the large cabinet as standard. In a heating only unit, it could be built in the small cabinet.

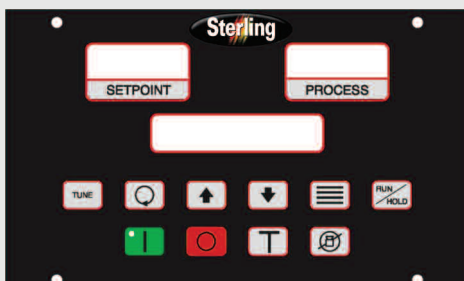

M2B+ Controller

- PID Control for both heating and cooling
- Built-in Ramp/Soak feature
- Setpoint, To Process, From Process, and DT displays
- Autovent sequence (adjustable from 1 to 10 minutes)
- °F or °C programmable
- 2 line by 20 character LCD to display status information and alarms

Dimensions

Small Cabinet: 30" W x 58" D x 70" H

Large Cabinet: 46" W x 58" D x 70" H



Sterling New Berlin

2900 S 160th Street
New Berlin, WI 53151 USA
Tel: +1 262 641 8610
Fax: +1 262 641 8653
www.sterlco.com

Sterling Schaumburg

1100 E Woodfield Rd #550
Schaumburg, IL 60173 USA
Tel: +1 847 273 7700
Fax: +1 847 273 7804

Sterling Warsaw

ul.Dziakowa 115
02-234 Warszawa
Tel: +48 22 390 9720
Fax: +48 22 390 9724

Sterling India

Gat No. 191/1, Sandbhor Complex,
Mhalunge, Chakan, Tal Khed,
Dist. Pune 410501, India
Tel: +91 21 35329112
Fax: +91 20 40147576

Sterling Suzhou

109 Xingpu Road SIP
Suzhou, China 215126
Tel: +86 512 8717 1919
Fax: +86 512 8717 1916

