



CENTRAL GRANULATOR

BP2039/2056 HD SERIES CENTRAL GRANULATORS

Cutting Chamber With Rotating End Discs

- Prevents polymer “melt-down”
- Virtually eliminates “endplate smearing”
- End ring (disc) rotates in relationship to the cutting chamber, improving airflow and minimizing frictional heat generation

Split Chamber

- Raises the upper half of the cutting chamber and lowers the screen cradle and discharge assembly via motorized screw jacks
- 50% reduction in clean out time
- Simplifies access for knife adjustments and replacement
- Allows further reducing of service downtime by not requiring the air evacuation piping system to be disconnected

Twinshear™ Knife Design


- Creates “scissor cutting” action, reducing energy consumption
- More efficient than chopping motion knife designs
- Allows the BP Series to handle the most difficult plastic purging

Standard Features

- Dual flywheel high torque design
- Unique rotor and disc design reduces frictional heat, helps prevent end-plate smearing
- Exclusive Twin Shear™ slicing action reduces energy consumption, fines and extends knife life
- Split chamber, easy cleanout service access

Options

- Up to 200 hp
- Hog style rotor
- Raised bed knife system
- Conveyor feed with amperage feedback

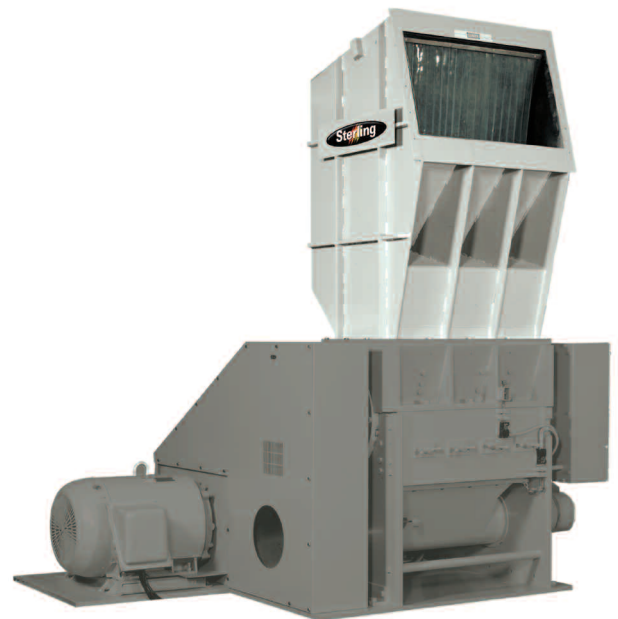

BP HD SERIES



	BP2039HD	BP2056HD
Throat Size	20" x 40"	20" x 56"
Cutting Circle	18"	
Throughput (3/8" screen)	2500	3500
Infeed	Conveyor	
Cutting Chamber	(2) Bed	
Rotor	(2) Knife Twin High Shear	
Rotor Knives	(3) HCHC	
Bed Knives	(2) HCHC	
Screen Diameter	3/8"	
Base	Airveyor	
Discharge	Airveyor	
Motor (tefc)	100	125
Drive	V-Belt	
Electrical Components	Safety switches wired into common junction box	
Controls	To suit voltage - 110V at operator station	
Accessories	Conveyors, blowers, cyclone separators to suit application	
Feed Height	102"	
Length	87" (2200 mm)	
Width	126" (3200 mm)	148" (3700 mm)
Height	122" (3100 mm)	122" (3100 mm)
Weight (lbs)	14,000	17,000

Ruggedly built to international standards, these machines will handle a wide variety of applications including bulky blow molded parts, thermoformed web and cut-sheet products, extruded sheet and film, plus the full gamut of post-consumer plastics for recycling operations.



Twinshear™ rotor directs material to center of cutting chamber, improving cutting efficiency and reducing side wall "smearing of material"



Clamshell opening design allows for easy access during cleaning and maintenance



Screw jack design opens hopper and lowers screen cradle



Sterling New Berlin
 2900 S 160th Street
 New Berlin, WI 53151 USA
 Tel: +1 262 641 8610
 Fax: +1 262 641 8653
www.sterlco.com

Sterling Schaumburg
 1100 E Woodfield Rd #550
 Schaumburg, IL 60173 USA
 Tel: +1 847 273 7700
 Fax: +1 847 273 7804

Sterling India
 Gat No. 191/1, Sandbhor Complex,
 Mhalunge, Chakan, Tal Khed,
 Dist. Pune 410501, India
 Tel: +91 21 35329112
 Fax: +91 20 40147576

Sterling Warsaw
 ul.Dziakowa 115
 02-234 Warszawa
 Tel: +48 22 390 9720
 Fax: +48 22 390 9724

Sterling Suzhou
 109 Xingpu Road SIP
 Suzhou, China 215126
 Tel: +86 512 8717 1919
 Fax: +86 512 8717 1916

