



BESIDE-THE-PRESS GRANULATOR

BP1012 AND 1018 SERIES BESIDE-THE-PRESS GRANULATORS

The BP1012 and 1018 Series granulators are designed for efficient beside-the-press regrind of reject components from injection molding, blow molding, and extrusion processes. Quiet-running and extremely versatile, they can be used with robot feed, conveyor feed or hand feed applications.

These sound-attenuating granulators are available in two models - 10x12 and 10x18. Both provide excellent quality regrind with the added advantage of reduced maintenance costs.

Features

- Hopper
 - Hand, robot or conveyor operation
 - Sound attenuated
 - Multi-feed
- Cutting Chamber
 - Offset design, 2 bed knives
 - Machined, bolted and doweled
 - Fully sound-attenuated to approximately 70-80 dBA
- 3-Knife Rotor
 - Open-scooped with rotating end discs
- Quick-Release Hand Knob Access
- Rotor and Bed Knives
 - D2 OEM manufactured
 - Proprietary process
- Removable pivoting drop-down screen and screen cradle
 - 1/4" standard, 3/16", 5/16", 3/8" and other sizes available
- 5 HP TEFC Motor and solid flywheel drive
- Standard metal bin discharge

Options


- Motor: 7.5 to 15 HP (5.625 to 11.25 kW) TEFC motors
- Discharges:
 - 1.25", 1.5" or 2.5" vacuum takeoff
 - 4" airveyor
- Knives:
 - D2 components and wear-resistant package for abrasive applications



BP1000 SERIES



Selector Guide		
Model	BP1012	BP1018
Cutting Circle	10" (254.0 mm), 426 rotor rpm	
Throughput	450 lbs/hr (204.5 kg/hr)	550 lbs/hr (249.5 kg/hr)
Cutting Chamber	10" x 12" (254 mm x 304.8 mm)	10" x 18" (254 mm x 457.2 mm)
Rotor Knives	3 knife open-scooped with rotating end discs	
Discharge	Bin standard	
Motor	5 HP (3.75 kW) TEFC standard	
Drive Parts	Flywheel/rotor (solid), drive belts, taper lock bearings, and adjustable motor base	
Base	Sound-enclosed base, caster-mounted for bin enclosure	
Electrical Components	Start/stop button, complete set of safety interlocks	
Controls	NEMA Type 12	
Feed Height	49.44" (1255.8 mm)	
Overall Height	58.25" (1479.6 mm)	
Overall Length	44.5" (1130.3 mm)	
Overall Width (A)	29.875" (758.8 mm)	35.875" (911.2 mm)
Weight	1275 lbs (578.3 kg)	1440 lbs (653.2 kg)

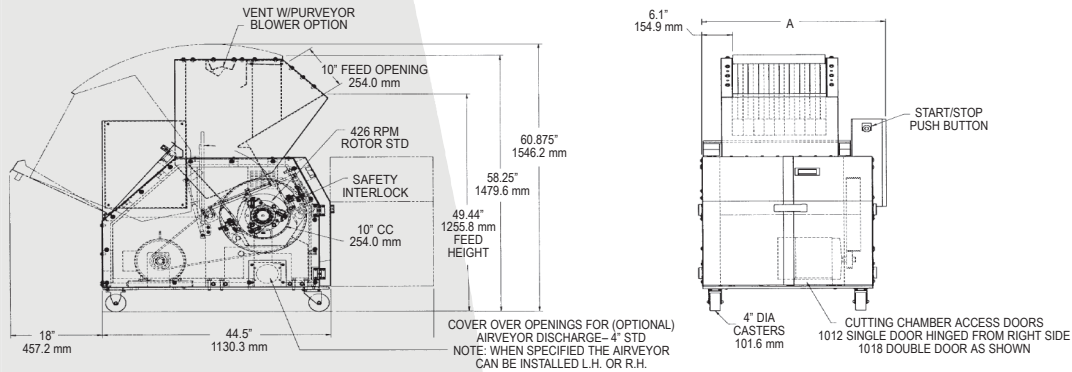

Sterling Schaumburg
 1100 E Woodfield Rd #550
 Schaumburg, IL 60173 USA
 Tel: +1 847 273 7700
 Fax: +1 847 273 7804

Sterling India
 Gat No. 191/1, Sandbhor Complex,
 Mhalunge, Chakan, Tal Khed,
 Dist. Pune 410501, India
 Tel: +91 21 35329112
 Fax: +91 20 40147576

Sterling Warsaw
 ul.Dziakowa 115
 02-234 Warszawa
 Tel: +48 22 390 9720
 Fax: +48 22 390 9724

Sterling Suzhou
 109 Xingpu Road SIP
 Suzhou, China 215126
 Tel: +86 512 8717 1919
 Fax: +86 512 8717 1916



Sterling New Berlin
 2900 S 160th Street
 New Berlin, WI 53151 USA
 Tel: +1 262 641 8610
 Fax: +1 262 641 8653
 www.sterlco.com

