

BULK STORAGE SERIES



Portable Storage Bins

CUSTOM DESIGNED TO SAVE TIME, SPACE AND ENERGY

Our extensive line of portable material holding bins are ideal for storing and transporting both raw materials and finished product. Designed in a variety of standard and custom shapes – bins are available in various sizes to maximize and conserve handling time, space and energy. Several components and accessories are available to your specific needs. Construction materials include carbon, stainless and aluminum. Specialty agitator bins are designed to enable difficult-to-flow material to be moved effectively.



Portable Storage Bins

Features

- 2-Way Fork Lift Entry
- Flared Stacking Pads
- Heavy Duty 14 Gauge Construction
- Painted Warm Gray (interior and exterior)

“Flo-Thru” Bins

- 45° Hopper Slope for easy to flow materials
- 4 Side Vacuum Wand Entry
- 4" Slide Gate with Tension Springs

Steep Slope “Flo-Thru” Bins

- 60° Hopper Slope for hard to flow materials
- 4 Side Vacuum Wand Entry
- 4" Slide Gate with Tension Springs

Options

- Available in Various Materials of Construction
- Casters
- Push bar
- Lexan® card holder
- Vacuum Take-Off Boxes
- Lift entries: 4-way fork lift, pallet jack
- Slide gates, without vacuum entries:
 - 8" slide gates
 - 10" slide gates
- 4" diameter view window
- Covers:
 - 1 piece, solid
 - 1 piece, 8" hole
 - 2 piece (Clam shell opening)
- Card holder, 3" x 5"
- Bag breaking grate for hopper w/cover
- Gaylord fill stand
- Special paint
- Interior paint
- Interior epoxy paint

BULK STORAGE SERIES


Portable Storage Bins

45° FLO-THRU BINS – 44" SQ

Height, in.	Capacity, cu. ft.	Features
36	20	Probe Ports, 4" Slidegate
46	30	Probe Ports, 4" Slidegate
56	40	Probe Ports, 4" Slidegate
66	50	Probe Ports, 4" Slidegate
76	60	Probe Ports, 4" Slidegate
30	20	No Probe Ports, 4" Slidegate
40	30	No Probe Ports, 4" Slidegate
50	40	No Probe Ports, 4" Slidegate
60	50	No Probe Ports, 4" Slidegate
70	60	No Probe Ports, 4" Slidegate
38	20	12" Opening
48	30	12" Opening
58	40	12" Opening
68	50	12" Opening
78	60	12" Opening

60° STEEP WALL FLO-THRU BINS – 44" SQ

Height, in.	Capacity, cu. ft.	Features
43	20	Probe Ports, 4" Slidegate
53	30	Probe Ports, 4" Slidegate
63	40	Probe Ports, 4" Slidegate
73	50	Probe Ports, 4" Slidegate
83	60	Probe Ports, 4" Slidegate
30	20	No Probe Ports, 4" Slidegate
40	30	No Probe Ports, 4" Slidegate
50	40	No Probe Ports, 4" Slidegate
60	50	No Probe Ports, 4" Slidegate
70	60	No Probe Ports, 4" Slidegate
38	20	12" Opening
48	30	12" Opening
58	40	12" Opening
68	50	12" Opening
78	60	12" Opening

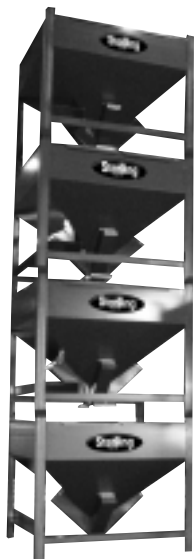

42° Flo-thru Bin



60° Steep Wall Flo-thru Bin



Gravity Discharge Stand



Stacked Bins