

MODEL SCC218



Local I/O Control System



OFFERS COMPLETE CONTROL OF 2 VACUUM PUMP AND UP TO 18 LOADING STATIONS

Conveying control is made easy with Sterling's SCC218 Series Controller. The icon based touch-screen allows control of up to 18 loading stations and 2 pumps with operating instructions built right into the controller. Other standard features include:

- Mitsubishi brick PLC icon based, 4" monochrome touch-screen controller
- Time or volume fill capability
- Vent valve output
- Closed-loop conveying (dry or ambient air) capability
- Common purge valve output control for each pump
- Local blowback filter cleaning outputs for implosion or blowback

Hardware

- 4" icon based, monochrome touch-screen operator interface
- 115/1/50-60 or 220/1/50 power input standard
- 24 Volt DC control output

Software

- 1- to 18-station, 2-pump control
- Pumps 1-2 have full capabilities or can be set as standby
- Active station icons indicate status
- Easy-to-read display
- Clear, visual alarm indicators

Optional Features

- Remote mount audible/visual alarm
- Ethernet capability
- Incoming power line filter

MODEL SCC218

Local I/O Control System




Electrical disconnect switch (standard)




Remote central alarm (optional)




6" color screen (optional)

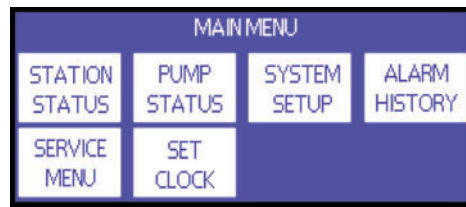

Main Menu

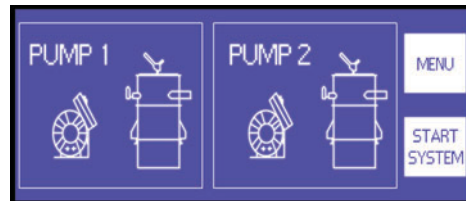

Pump Status Vacuum

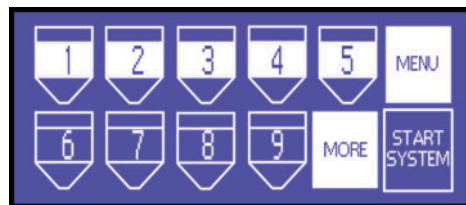

Loading Station Status



PRODUCT. PERFORMANCE. EXCELLENCE.

2900 S 160th Street
New Berlin, Wisconsin 53151 USA
Ph: 262.641.8610 Fax: 262.641.8653



Granulate



Regulate



Automate



Integrate