

SH SERIES



12 to 425 Cu. Ft.
Drying Hoppers



LARGE DRYING HOPPERS

Standard models are constructed of insulated carbon steel and contain no material hang-up points with solid internal walls. Value-added standard equipment includes heavy duty slide gate, convenient lifting lugs and hopper cover. No gaskets are used in the SH hoppers, which allows for a precision, laser cut door.

Features

- Unique mass flow design
- Carbon steel construction with aluminum cover on the outside
- Integral welded carbon steel frame
- 2" (5 cm) fiberglass insulation on insulated models
- Hinged access door with long sight glass
- Inlet/outlet tube stubs should be specified when ordering
- Slide gate
- Drain port

Options

- Stainless steel construction
- Sensors, less controls: Single level RF-style sensor 115 or 230V; dual level RF-style sensor 115 or 230 V; demand level sensor 115V
- Air-operated discharge slide gate, less controls
- Adapter to mount SSK 85/170 vacuum receiver






SH SERIES

12 to 425 Cu. Ft.
Drying Hoppers



Model	Size, cu. ft. (l)	Weight, lbs. (kg)	A	B	C	D	E	F	G	H	J
SH12	12 (340)	420 (191)	24	28	11	68	3	3	10	9	10 1/8
SH17	17 (481)	595 (270)	24	28	11	88	3	3	10	9	10 1/8
SH23	23 (651)	805 (365)	30	34	11	81	3	3	10	9	10 1/8
SH30	30 (850)	1050 (476)	30	34	11	99	3	3	10	9	10 1/8
SH45	45 (1274)	1575 (714)	40	44	15	100	3	5	16 1/4	12	17-1/8
SH60	60 (1699)	2100 (953)	40	44	35	120	5	5	16 1/4	12	17-1/8
SH75	75 (2124)	2625 (1191)	40	44	56	141	5	5	16 1/4	12	17-1/8
SH90	90 (2549)	3150 (1429)	50	54	23	126	8	5	16 1/4	12	17-1/8
SH135	135 (3823)	4725 (2143)	50	54	52	163	8	5	16 1/4	12	17-1/8
SH180	180 (5097)	6300 (2858)	64	68	63	156	8	5	16 1/4	12	17-1/8
SH240	240 (6796)	8400 (3810)	64	68	92	185	10	5	16 1/4	12	17-1/8
SH300	300 (8495)	10,500 (4763)	74	78	75	186	10	5	16 1/4	12	17-1/8
SH425	425 (12,035)	14,875 (6747)	74	78	114	225	10	5	16 1/4	12	17-1/8

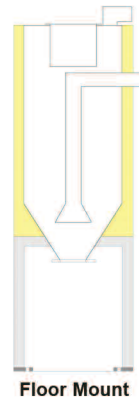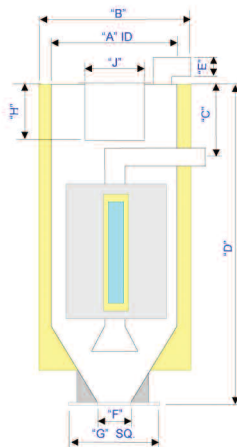

PRODUCT. PERFORMANCE. EXCELLENCE.

2900 S 160th Street
New Berlin, Wisconsin 53151 USA
Ph: 262.641.8610 Fax: 262.641.8653

