

# SS SERIES



## Screenless Beside-the-Press Granulators

### DEPENDABLE, RELIABLE SERVICE IN A COMPACT PACKAGE

The SS Series, the latest innovation from Sterling, features screenless operation with no longs regrind. The small footprint squeezes into the tightest of spaces. Its rugged, heavy-duty construction packed with innovative standard features assures years of dependable, reliable service.



#### Features

- Screenless operation produces clean, no longs regrind
- Smallest footprint squeezes into the tightest of spaces
- Quick and easy, no tools access – just open the doors
- Vacuum bin with 1" or 2" diameter take-offs available
- Solid dowel and bolted construction
- Locking swivel casters mounted on base
- TEFC 230/3/60 or 460/3/60 gear motor
- 115/1/60 control voltage wired with electrical/mechanical safety interlock

#### Options


- Compressed air evacuation system
- High level indicator

# SS SERIES


## Screenless Beside-the-Press Granulators

### SPECIFICATIONS


Model	SS1010	SS1213	SS1616
Chamber Size (in.)	10 x 10.5"	11.5 x 13.5"	16" x 16"
Cutter Size, mm (in.)	5mm (.18")		
Feed Height, inches	52"	60"	63"
Throughput, lbs./hr	30 lbs./hr	40 lbs./hr	50 lbs./hr
Working Envelope (L x W)	29"x18"	32.5"x23"	23"x49"
Weight (lbs.)	396 lbs	606 lbs	992 lbs

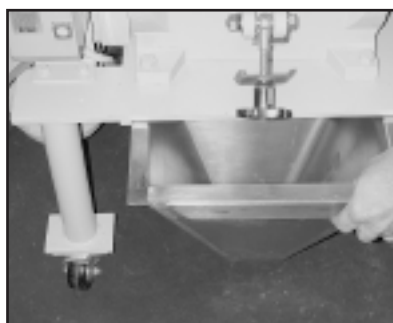

Slide out discharge

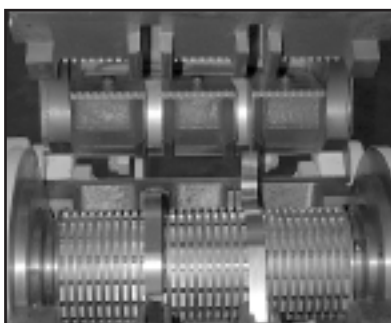

Clamshell opening for  
easy cleaning

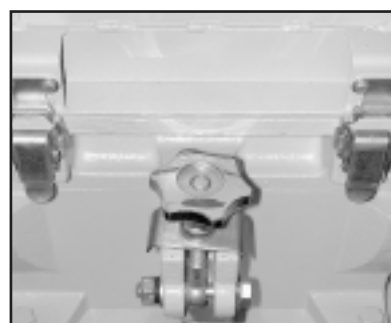

"Tool free" opening for quick  
access during cleaning