



SINGLE SHAFT SHREDDER

EXTREME DUTY SHREDDER


Designed for processing plastic waste for reclamation and recycling, large extruder purgings, large reject parts, trim scraps, baled or loose film, synthetic fiber, wood processing scrap, medical waste, cardboard, paper and carpet. All of the SG Series Single Shaft Shredders feature the following:

Features

- Low speed/high torque design
- Easy accessibility
- Tramp metal protection
- Touch pad monitoring and control
- Low RPM/low noise
- Large infeed hopper
- Precision hydraulic "process ram"
- 4-way, indexible cutting inserts
- High output "torsion point" cutting rotor
- Severe-duty construction with rugged hydraulics
- 0.015" knife gap and easy-access screen
- Stress-free frame
- Lifetime limited warranty on cutting rotor
- Oversized drivetrain
- Heavy outboard spherical roller bearings
- Fluid "turbocoupling"
- PLC control panel
- ISO 9001 manufactured

Options

- Optional control brands
- Quick disconnect and quick clean screens
- Application specific programming and control integration
- Multiple rotor configurations
- Special purpose screens
- Critical-duty drivetrain
- High speed ram
- Wear resistant cutting chamber
- Turn-key installation with custom conveyor systems engineering and material handling equipment

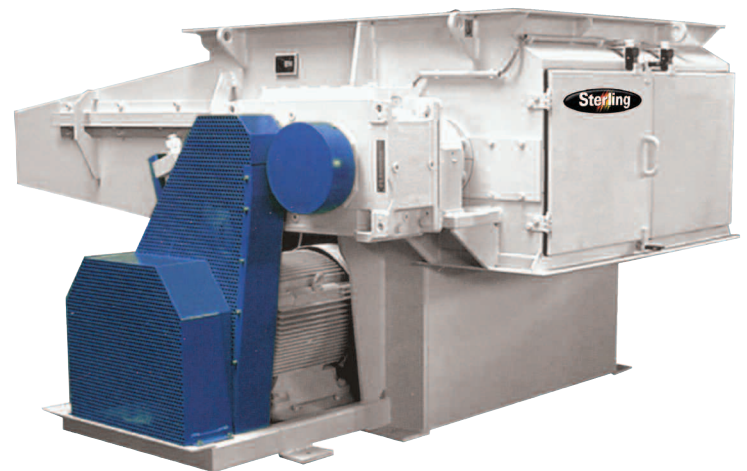


SG SERIES



Chamber size	Infeed opening, in.	Available HP													
		20	25	30	40	50	60	75	100	125	150	200	225	250	
24	24 x 14	X													
32	32 x 40	X		X											
42	42 x 48		X	X	X	X									
52	52 x 68				X	X	X	X	X	X					
62	63 x 80							X	X	X					
78	78 x 87										X	X			
98	98 x 120										X	X	X	X	

- 1 Hinged cover provides protection to ram drive cylinders and allows easy access for cleaning.
- 2 Heavy shelf over ram cavity to protect against impact with heavy parts.
- 3 Cutting rotor is engineered for durability and carries a Limited Lifetime Warranty. Cutting inserts are precision fit for easy maintenance.
- 4 Anvil has a replaceable counterknife plate with close tolerance profile.
- 5 Hinged clean-out access doors with safety switches to access screen and cutting rotor for maintenance.
- 6 High quality, double row, self-aligning spherical outboard mounted roller bearings to prevent contamination.
- 7 Oversized reduction gearbox rated to crush rock.
- 8 Flanged discharge to accommodate assortment of pneumatic and mechanical conveyance systems.
- 9 Sizing screens from 3/8 to 3" add economical production of consistent particles in one pass.
- 10 Fluid coupling absorbs micro vibrations and converts torque under load.
- 11 Banded belt drive provides positive transmission and protection of drive train.
- 12 High quality, energy efficient drive motors with thermocouple interlocks.
- 13 Torque arm with disc springs to shock absorb gearbox. Equipped with shut down switch to limit damage from tramp metal.
- 14 Heavy side walls, braces and reinforcements.
- 15 Heavy duty hydraulic pump package reacts quickly to high shock loads. Hydraulic system includes a 2-stage pump, oversized cooling capacity and large reservoir.
- 16 Process ram provides precision feed of material to cutting rotor. Ram quickly adjusts to different load variables to maximize processing efficiency.
- 17 Quick change oversized ram guide rails.
- 18 Heavy dual cushioned hydraulic cylinders to advance process ram. Cylinders are secured with reinforced, vibration dampening clamps.

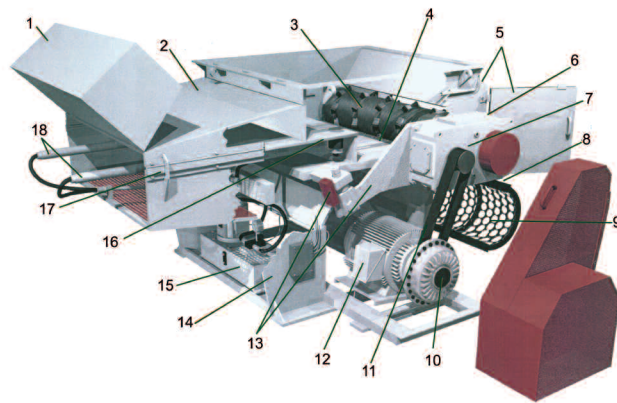

The "U" rotor is the industry's most successful cutting rotor design. "U" model is for wood grinding, light plastics, and light waste. "K" model is for demanding plastic, wood, paper, and waste.



Precision 4-sided cutting inserts are rotated to offer longer cutting life and are easily accessed for fast replacement.



Hinged cover provides protection to ram drive cylinders and allows easy access for routine cleaning.



Sterling New Berlin
 2900 S 160th Street
 New Berlin, WI 53151 USA
 Tel: +1 262 641 8610
 Fax: +1 262 641 8653
www.sterlco.com

Sterling Schaumburg
 1100 E Woodfield Rd #550
 Schaumburg, IL 60173 USA
 Tel: +1 847 273 7700
 Fax: +1 847 273 7804

Sterling India
 Gat No. 191/1, Sandbhor Complex,
 Mhalunge, Chakan, Tal Khed,
 Dist. Pune 410501, India
 Tel: +91 21 35329112
 Fax: +91 20 40147576

Sterling Warsaw
 ul.Dziakowa 115
 02-234 Warszawa
 Tel: +48 22 390 9720
 Fax: +48 22 390 9724

Sterling Suzhou
 109 Xingpu Road SIP
 Suzhou, China 215126
 Tel: +86 512 8717 1919
 Fax: +86 512 8717 1916

