




# PORTABLE SERIES

## Storage Bin

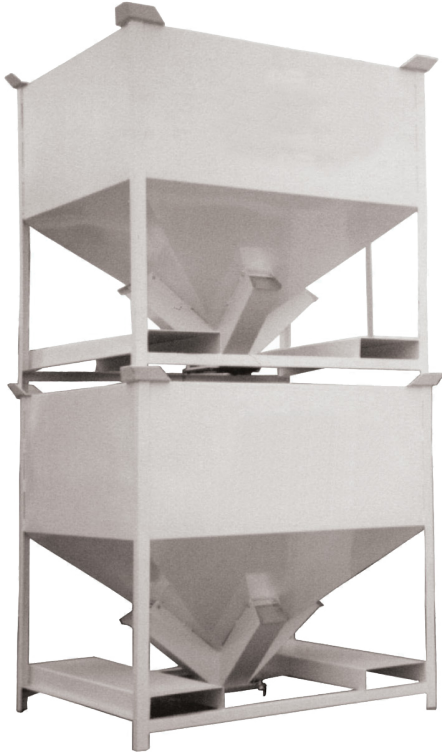

## Technical Specifications

Our extensive line of portable material holding bins are ideal for storing and transporting both raw materials and finished product. Designed in a variety of standard and custom shapes – bins are available in various sizes to maximize and conserve handling time, space and energy. Several components and accessories are available to your specific needs. Construction materials include carbon, stainless and aluminum. Specialty agitator bins are designed to enable difficult-to-flow material to be moved effectively.

### Features

#### Standard Features

- 2-Way Fork Lift Entry
- Flared Stacking Pads
- Heavy Duty 14 Gauge Construction
- Painted Warm Gray (interior and exterior)

#### "FLO-THRU" BINS

- 45° Hopper Slope for easy to flow materials
- 4 Side Vacuum Wand Entry
- 4" Slide Gate with Tension Springs


#### STEEP SLOPE "FLO-THRU" BINS

- 60° Hopper Slope for hard to flow materials
- 4 Side Vacuum Wand Entry
- 4" Slide Gate with Tension Springs

#### Optional Features

- Available in Various Materials of Construction Casters
- Push bar
- Lexan® card holder
- Vacuum Take-Off Boxes
- Lift entries: 4-way fork lift, pallet jack
- Slide gates, without vacuum entries:
  - 8" slide gates
  - 10" slide gates
- 4" diameter view window
- Covers:
  - 1 piece, solid
  - 1 piece, 8" hole
  - 2 piece (Clam shell opening)
- Card holder, 3" x 5"
- Bag breaking grate for hopper w/cover
- Gaylord fill stand
- Special paint
- Interior epoxy paint

## Product Diagrams

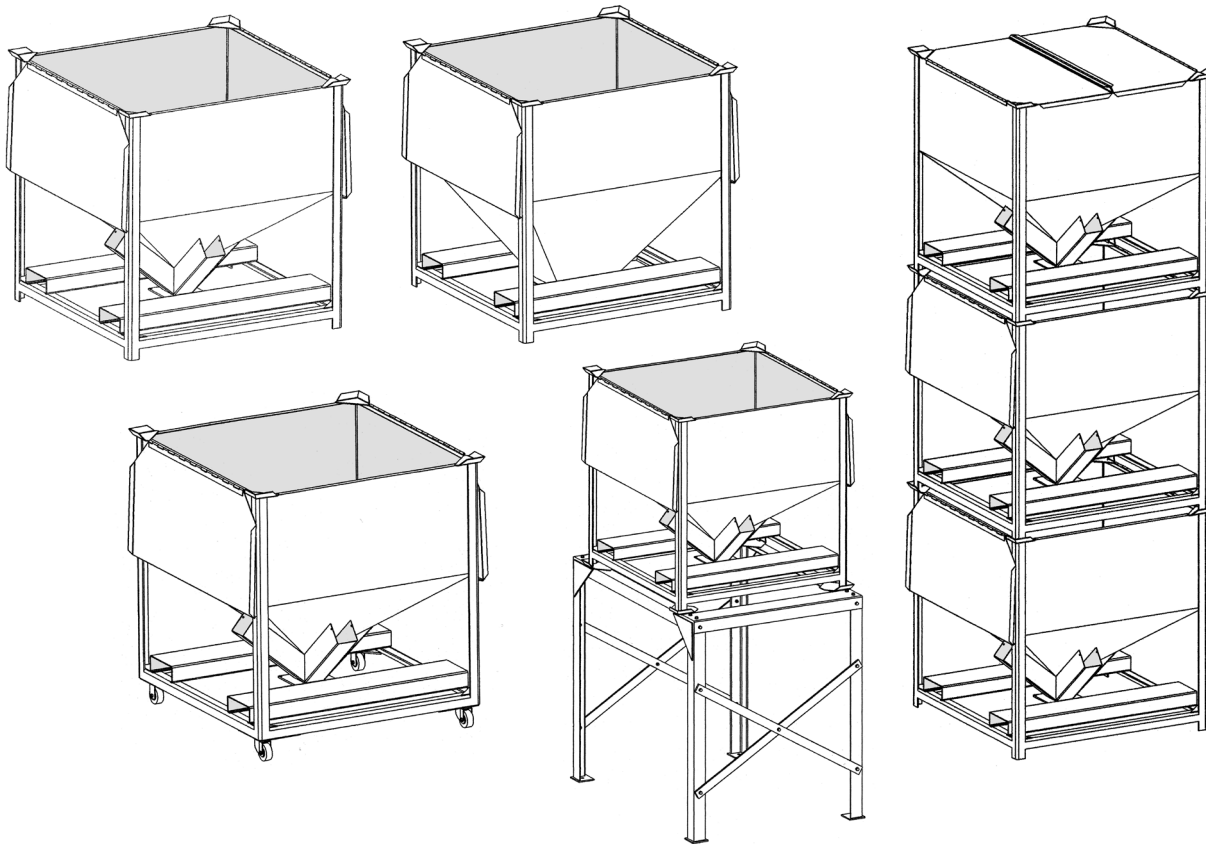

## Specifications

45° FLO-THRU BINS- 44" SQ.		
Height, in.	Capacity, cu. ft.	Features
36	20	Probe Ports, 4" sidegate
46	30	Probe Ports, 4" sidegate
56	40	Probe Ports, 4" sidegate
66	50	Probe Ports, 4" sidegate
76	60	Probe Ports, 4" sidegate
30	20	No Probe Ports, 4" sidegate
40	30	No Probe Ports, 4" sidegate
50	40	No Probe Ports, 4" sidegate
60	50	No Probe Ports, 4" sidegate
70	60	No Probe Ports, 4" sidegate
38	20	12" Opening
48	30	12" Opening
58	40	12" Opening
68	50	12" Opening
78	60	12" Opening

60° STEEP WALL FLO-THRU BINS- 44" SQ.		
Height, in.	Capacity, cu. ft.	Features
43	20	Probe Ports, 4" sidegate
53	30	Probe Ports, 4" sidegate
63	40	Probe Ports, 4" sidegate
73	50	Probe Ports, 4" sidegate
83	60	Probe Ports, 4" sidegate
30	20	No Probe Ports, 4" sidegate
40	30	No Probe Ports, 4" sidegate
50	40	No Probe Ports, 4" sidegate
60	50	No Probe Ports, 4" sidegate
70	60	No Probe Ports, 4" sidegate
38	20	12" Opening
48	30	12" Opening
58	40	12" Opening
68	50	12" Opening
78	60	12" Opening