



PORTABLE CHILLERS

ADVANCED TECHNOLOGY FOR ENHANCED PERFORMANCE

SMC Series Air-, and Water- Cooled Chillers from Sterling provide 2 to 3.5 ton cooling capacities with very compact footprints. These chillers feature a unique enclosure design that simplifies service and maintenance, and conserves valuable production floor space. Incorporate these SMC Chillers into your planned or existing production layout easily and effectively.

SMC 2 & 3.5 hp models feature hermetic scroll compressors, which provide low noise and high reliability because there are fewer moving parts, reduced rotating mass and less internal friction than reciprocating compressors. They also come with brazed plate evaporators and polyethylene reservoirs up to 6 gallons.

All SMC Series Chillers have an operating leaving water temperature range of 35 to 65°F. They feature an advanced off-the-shelf microprocessor-based controller with To Process and Set Point LED readouts, for fast, simple programming.

Features

- R410a refrigerant
- Easy access panels
- 1 year compressor and labor warranty; 2 year parts warranty; 3 year limited controller warranty
- NEMA 12 electrical enclosure
- Non-fused disconnect switch with single point power connection
- Branch motor fusing
- "Y" strainer on process water line to evaporator
- 1/16 DIN PID auto-tuning, off-the-shelf modular controller is accurate to within +/- 1°F
- Stamped, stainless steel, horizontally mounted pump assures reliability
- Non-ferrous piping
- Air-cooled units feature aluminum fin/copper tube condensers with easy on/off, washable air filters
- Water-cooled units equipped with water regulating valves and have tube-in-tube condensers

Options

- Automatic water makeup valve
- Audible/visual alarm
- Other options available




SMC SERIES



Model Number		SMCA-, SMCW-	
		2	3.5
Compressor, HP (kW)		2 (1.5)	3.5 (2.6)
Reservoir, gal (liters)		6 (23)	
Dimensions, in (mm)	SMCA	Height	49.66 (1261)
		Width	22.0 (559)
		Depth	41.68 (1058)
	SMCW	Height	28.31 (719)
		Width	22.0 (559)
		Depth	41.68 (1058)
Shipping weight, lbs (kgs)	SMCA	417 (189)	440 (200)
	SMCW	365 (165)	390 (178)

1 Depth includes piping extending out of the back of the chiller.

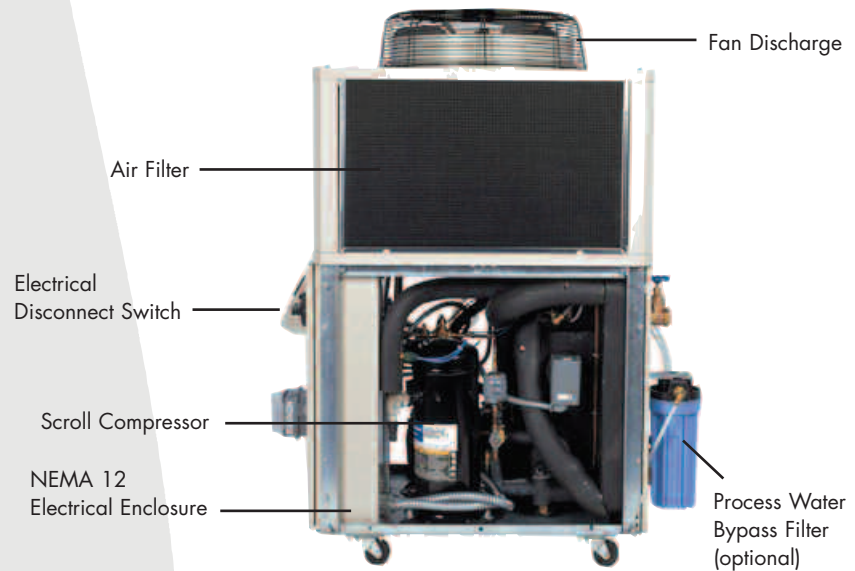

Sterling New Berlin
 2900 S 160th Street
 New Berlin, WI 53151 USA
 Tel: +1 262 641 8610
 Fax: +1 262 641 8653
 www.sterlco.com

Sterling Schaumburg
 1100 E Woodfield Rd #550
 Schaumburg, IL 60173 USA
 Tel: +1 847 273 7700
 Fax: +1 847 273 7804

Sterling India
 Gat No. 191/1, Sandbhor Complex,
 Mhalunge, Chakan, Tal Khed,
 Dist. Pune 410501, India
 Tel: +91 21 35329112
 Fax: +91 20 40147576

Sterling Warsaw
 ul.Dziakowa 115
 02-234 Warszawa
 Tel: +48 22 390 9720
 Fax: +48 22 390 9724

Sterling Suzhou
 109 Xingpu Road SIP
 Suzhou, China 215126
 Tel: +86 512 8717 1919
 Fax: +86 512 8717 1916

